

Photon-assisted electron transmission resonance through a quantum well with spin-orbit coupling

Cun-Xi Zhang¹, Y.-H. Nie^{1,2,*} and J.-Q. Liang¹

¹Institute of Theoretical Physics and Department of Physics,
Shanxi University, Taiyuan, Shanxi 030006, China

²Department of Physics, Yanbei Normal Institute, Datong, Shanxi 037000, China

February 6, 2008

Abstract

Using the effective-mass approximation and Floquet theory, we study the electron transmission over a quantum well in semiconductor heterostructures with Dresselhaus spin-orbit coupling and an applied oscillation field. It is demonstrated by the numerical evaluations that Dresselhaus spin-orbit coupling eliminates the spin degeneracy and leads to the splitting of asymmetric Fano-type resonance peaks in the conductivity. In turn, the splitting of Fano-type resonance induces the spin-polarization-dependent electron-current. The location and line shape of Fano-type resonance can be controlled by adjusting the oscillation frequency and the amplitude of external field as well. These interesting features may be a very useful basis for devising tunable spin filters.

PACS numbers: 73.23.-b, 72.25.Dc, 73.63.Hs

The Fano-type resonance, which arises from interference between a localized state and the continuum band[1], has been widely known across many different branches of physics and observed in a great variety of experiments including atomic photoionization[2], electron and neutron scattering[3], Raman scattering[4], and photoabsorption in quantum well structures[5, 6]. In recent years, Fano-type resonances have been reported to appear also in the experiments on electron transport through mesoscopic systems. Fano-type resonances in electronic transport through a single-electron transistor allow one to alter the interference between the two paths by changing the voltages on various gates[7]. Reference[8] reported the first tunable Fano experiment in which a well-defined Fano system is realized in an Aharonov-Bohm(AB) ring with a quantum dot(QD) embedded in one of its arms, which is the first convincing demonstration of this effect in mesoscopic systems. The Fano effect in a quantum wire with a side-coupled quantum dot occurs in a way different

*E-mail: nieyh@sxu.edu.cn

from that in QD-AB-ring system, because only reflected electrons at the QD are involved for its emergence[9, 10, 11]. However, except Ref.[12] which reported the first Fano-type resonances due to the interaction of the electron states with opposite spin-orientation, so far the Fano effects have been studied theoretically and experimentally for electron transport through mesoscopic systems but not considering, to our knowledge, the electron spin degree of freedom which plays an important role in spintronics. Recently, a large number of spin-dependent phenomena—for instance, Datta-Das spin field-effect transistor[13] spin transport[14], spin Hall effect[15], spin-dependent tunneling phenomena in semiconductor heterostructures[16], and so on—have attracted great attention because of the prospect of technological applications.

In general, the condition for the Fano-type resonance to occur is the presence of two scattering channels at least: the discrete level and continuum band. In the mesoscopic systems mentioned above, the nature of two scattering channels is dependent on the geometry of the device under consideration. In this paper we adopt the interferometer geometry which is realized by a time-periodic quantum well in semiconductor heterostructures and study the spin-dependent Fano resonance and electron transport over through the quantum well with Dresselhaus spin-orbit coupling. Floquet scattering through a time-periodic potential induces mixing of the continuum and bound states and leads to the appearance of asymmetric Fano-type resonances in the conductivity. The effect of Dresselhaus spin-orbit coupling on the motion of electrons makes the effective band mass of electrons dependent on the spin-orientation; consequently, the asymmetric Fano-type resonance splits into two different peaks corresponding to electrons with opposite spin polarization, which leads to the spin-polarization-dependent transmission electron-current.

We consider the transmission of a single electron with incident wave vector $k = (k_{||}, k_z)$ through a one-dimension time-periodic potential well which extends from 0 to a —that is,

$$V(z, t) = \begin{cases} 0, & z < 0 \text{ and } z > a \\ -V_0 + V_1 \cos(\omega t), & 0 \leq z \leq a \end{cases}, \quad (1)$$

here the well depth V_0 grows along $z \parallel [001]$ and can be adjusted by an applied field, $k_{||}$ is the wave vector parallel to the plane of the well, and k_z is the wave vector normal to the well plane along the direction of tunnelling. The electron passes three regions from the left to the right with I , III and II denoting the right, left and central regions, respectively. We assume a low enough temperature such that the electron-phonon interactions considered in Ref.[17] can be neglected. Thus the electron motion in semiconductor heterostructures may be described by a time-dependent Schrödinger equation

$$i\hbar \frac{\partial}{\partial t} \Phi(z, s, t) = \hat{H} \Phi(z, s, t) \quad (2)$$

with Hamiltonian

$$\hat{H} = -\frac{\hbar^2}{2\mu} \frac{\partial^2}{\partial z^2} + \frac{\hbar^2 k_{||}^2}{2\mu} + V(z, t) + \hat{H}_D, \quad (3)$$

$$\hat{H}_D = \begin{cases} 0, & z < 0 \text{ and } z > a \\ \gamma [\hat{\sigma}_x k_x (k_y^2 - k_z^2) + \hat{\sigma}_y k_y (k_z^2 - k_x^2) + \hat{\sigma}_z k_z (k_x^2 - k_y^2)], & 0 \leq z \leq a \end{cases} \quad (4)$$

Where μ is the effective mass of electron and $\hat{H}_D$ denotes the spin-dependent Dresselhaus term in Zinc-blende structure semiconductors[18]. $\hat{\sigma}_\alpha$ is the Pauli matrices, and γ a material constant describing the strength of the spin-orbit coupling. We have assumed that $\gamma \approx 0$ outside the well. In the quantum well with finite depth the confinement of the electron wave function in the growth direction forces quantization of the corresponding component of the wave vector; thus, one should consider k_z in Hamiltonian as an operator $-i\partial/\partial z$. Assuming that the kinetic energy of the incidence electron is much smaller than the well depth V_0 the Dresselhaus term $\hat{H}_D$ may be simplified to[16]

$$\hat{H}_D = \begin{cases} 0, & z < 0 \text{ and } z > a \\ \gamma (\hat{\sigma}_x k_x - \hat{\sigma}_y k_y) \frac{\partial^2}{\partial z^2}, & 0 \leq z \leq a \end{cases} \quad (5)$$

Using Pauli matrices the Hamiltonian (3) inside potential well can be written as

$$\hat{H} = \begin{bmatrix} -\frac{\hbar^2}{2\mu} \frac{\partial^2}{\partial z^2} + \frac{\hbar^2 k_{||}^2}{2\mu} + V(z, t) & \gamma k^+ \frac{\partial^2}{\partial z^2} \\ \gamma k^- \frac{\partial^2}{\partial z^2} & -\frac{\hbar^2}{2\mu} \frac{\partial^2}{\partial z^2} + \frac{\hbar^2 k_{||}^2}{2\mu} + V(z, t) \end{bmatrix} \quad (6)$$

with $k^\pm = k_x \pm ik_y$. Inserting $\Phi(z, s, t) = \psi(z, t)\chi_s$ with χ_s the spin wave function and Eq.(6) into Schrödinger Eq.(2) we obtain

$$\chi_\pm = \frac{1}{\sqrt{2}} \begin{pmatrix} 1 \\ \mp e^{-i\varphi} \end{pmatrix} \quad (7)$$

which describes the electron spin states of the opposite spin polarizations. Here φ is the polar angle of the wave vector $\vec{k}$ in the xy plane, $\vec{k}_{||} = (k_{||} \cos \varphi, k_{||} \sin \varphi)$, The orientation of electron spins $\vec{s}_\pm(\vec{k}_{||}) = \chi_\pm^\dagger \hat{\sigma} \chi_\pm = (\mp \cos \varphi, \pm \sin \varphi, 0)$ corresponding to the eigenstates $\chi_\pm$ depends on the direction of the wave vector $\vec{k}_{||}$ in the xy plane. In the spin subspace the Hamiltonian $\hat{H}$ may be reduced as

$$\hat{H}_\pm = \chi_\pm^\dagger \hat{H} \chi_\pm = -\frac{\hbar^2}{2\mu_\pm} \frac{\partial^2}{\partial z^2} + \frac{\hbar^2 k_{||}^2}{2\mu} + V(z, t), \quad (8)$$

where the modified effective mass of the electron depends not only on Dresselhaus coupling constant γ and in-plane electron wave vector $k_{||}$, but also on the orientation of the electron spin, and is given by $\mu_\pm = \mu (1 \pm \gamma 2\mu k_{||}/\hbar^2)^{-1}$. Although the modification of the electron effective mass is very small, it plays an important role in the generation of the asymmetric Fano resonance peak-splitting. Thus the Schrödinger equation can be rewritten as

$$i\hbar \frac{\partial}{\partial t} \Phi_{\pm}(z, t) = \hat{H}_{\pm} \Phi_{\pm}(z, t) \quad (9)$$

with

$$\Phi_{\pm}(z, t) = \chi_{\pm} \psi_{\pm}(z, t) \exp(i\vec{k}_{\parallel} \cdot \vec{\rho}) \quad (10)$$

where $\vec{\rho} = (x, y)$ is a vector in the well-plane. Inserting Eq.(8) and (10) into Eq.(9) we obtain the equation of $\psi_{\pm}(z, t)$

$$i\hbar \frac{\partial}{\partial t} \psi_{\pm}(z, t) = -\frac{\hbar^2}{2\mu_{\pm}} \frac{\partial^2}{\partial z^2} \psi_{\pm}(z, t) + \frac{\hbar^2 k_{\parallel}^2}{2\mu} \psi_{\pm}(z, t) + V(z, t) \psi_{\pm}(z, t). \quad (11)$$

Inside the potential well, the potential $V(z, t)$ in Eq.(11) is a periodic function of time, thus, according to the Floquet theorem[19, 20, 21] Eq.(11) has a solution of the form

$$\psi_{\pm}^F(z, t) = \varphi_{\pm}(z, t) \exp(-iE_F^{\pm}t/\hbar), \quad (12)$$

where $E_F^{\pm}$ is the Floquet energy eigenvalue and $\varphi_{\pm}(z, t)$ is a periodic function of time: $\varphi_{\pm}(z, t) = \varphi_{\pm}(z, t + T)$ with period $T = \frac{2\pi}{\omega}$. Substituting Eq.(12) into (11) for $\varphi_{\pm}(z, t) = g_{\pm}(z)f_{\pm}(t)$, we have two separated equations with an introduced constant $E^{\pm}$ [22, 23]

$$-\frac{\hbar^2}{2\mu_{\pm}} \frac{d^2}{dz^2} g_{\pm}(z) = \left(E^{\pm} + V_0 - \frac{\hbar^2 k_{\parallel}^2}{2\mu} \right) g_{\pm}(z), \quad (13)$$

$$i\hbar \frac{d}{dt} f_{\pm}(t) - V_1 \cos(\omega t) f_{\pm}(t) = (E^{\pm} - E_F^{\pm}) f_{\pm}(t). \quad (14)$$

The solution of Eq.(14) is found as

$$f_{\pm}(z, t) = \exp[-i(E^{\pm} - E_F^{\pm})t/\hbar] \sum_{n=-\infty}^{+\infty} J_n \left(\frac{V_1}{\hbar\omega} \right) \exp(-in\omega t). \quad (15)$$

Where we have taken the initial condition $f_{\pm}(0) = 1$, and $J_n(x)$ is the n-th order Bessel function of the first kind. Since $f_{\pm}(t) = f_{\pm}(t + T)$, Eq. (14) requires that $E^{\pm} = E_m^{\pm} = E_F^{\pm} + m\hbar\omega$ with m being an integer.

The incoming and outgoing waves (channels) of Floquet scattering form the sidebands (or Floquet channels) with energy spacing $\hbar\omega$ according to $E_m^{\pm} = E_F^{\pm} + m\hbar\omega$ (m is the sideband index). The mode of $E_m < 0$ is an evanescent mode, and the corresponding sideband is called an evanescent sideband because such a mode with imaginary k_m can not propagate[23, 24]. The equation of $g_{\pm}(z)$ has a solution

$$g_{\pm}(z) = \sum_{m=-\infty}^{+\infty} [a_m^{\pm} e^{iq_m^{\pm} z} + b_m^{\pm} e^{-iq_m^{\pm} z}], \quad (16)$$

where $a_m^\pm$ and $b_m^\pm$ are constant coefficients and $q_m^\pm = \left[\frac{2\mu_\pm}{\hbar^2} (E_F^\pm + m\hbar\omega - \frac{\hbar^2 k_\parallel^2}{2\mu} + V_0) \right]^{1/2}$. Thus the wave function inside the oscillation-potential well can be expressed as

$$\begin{aligned} \Phi_\pm^{II}(z, t) = & \chi_\pm \sum_{n=-\infty}^{+\infty} \sum_{m=-\infty}^{+\infty} [a_m^\pm e^{iq_m^\pm z} + b_m^\pm e^{-iq_m^\pm z}] J_{n-m}\left(\frac{V_1}{\hbar\omega}\right) e^{-iE_{zn}^\pm t/\hbar} \\ & \cdot \exp(i\vec{k}_\parallel \cdot \vec{\rho} - iE_\parallel^\pm t/\hbar). \end{aligned} \quad (17)$$

Since electrons incident to the oscillating region will be scattered inelastically into an infinite number of Floquet sidebands, so the wave function outside the well can be written as the superposition of waves with all values of energy:

$$\Phi_\pm^I(z, t) = \chi_\pm [e^{ik_{z0}^\pm z - iE_{z0}^\pm t/\hbar} + \sum_{n=-\infty}^{+\infty} r_{n0}^\pm e^{-ik_{zn}^\pm z - iE_{zn}^\pm t/\hbar}] \exp(i\vec{k}_\parallel \cdot \vec{\rho} - iE_\parallel^\pm t/\hbar), \quad (18)$$

$$\Phi_\pm^{III}(z, t) = \chi_\pm \sum_{n=-\infty}^{+\infty} t_{n0}^\pm e^{ik_{zn}^\pm z - iE_{zn}^\pm t/\hbar} \exp(i\vec{k}_\parallel \cdot \vec{\rho} - iE_\parallel^\pm t/\hbar), \quad (19)$$

where $E_{z0}^\pm + E_\parallel^\pm = E_0^\pm$, $E_\parallel^\pm = \frac{\hbar^2 k_\parallel^2}{2\mu_1}$ and $k_{zn}^\pm = \sqrt{\frac{2\mu_1}{\hbar^2} (E_{z0}^\pm + n\hbar\omega)}$. For the sake of simplicity we consider the case that $E_0^\pm < \hbar\omega$ corresponding to the propagating mode of the lowest energy. $r_{n0}^\pm$ and $t_{n0}^\pm$ are the probability amplitudes of the reflecting waves and outgoing waves from the sideband 0 to sideband n , respectively. The continuity of $\Phi_\pm$ and $\frac{1}{\mu} \frac{\partial}{\partial z} \Phi_\pm$ at the interfaces $z = 0$ and $z = a$ requires

$$\sum_{m=-\infty}^{+\infty} J_{n-m}\left(\frac{V_1}{\hbar\omega}\right) (a_m^\pm + b_m^\pm) = \delta_{n0} + r_{n0}^\pm, \quad (20)$$

$$\frac{\mu_1}{\mu_\pm} \sum_{m=-\infty}^{+\infty} J_{n-m}\left(\frac{V_1}{\hbar\omega}\right) q_m^\pm (a_m^\pm - b_m^\pm) = k_{zn}^\pm (\delta_{n0} - r_{n0}^\pm), \quad (21)$$

$$\sum_{m=-\infty}^{+\infty} J_{n-m}\left(\frac{V_1}{\hbar\omega}\right) (e^{iq_m^\pm a} a_m^\pm + e^{-iq_m^\pm a} b_m^\pm) = e^{ik_{zn}^\pm a} t_{n0}^\pm, \quad (22)$$

$$\frac{\mu_1}{\mu_\pm} \sum_{m=-\infty}^{+\infty} J_{n-m}\left(\frac{V_1}{\hbar\omega}\right) q_m^\pm (e^{iq_m^\pm a} a_m^\pm - e^{-iq_m^\pm a} b_m^\pm) = k_{zn}^\pm e^{ik_{zn}^\pm a} t_{n0}^\pm. \quad (23)$$

The continuity conditions of the wave functions Eq.(20) to (23) can be expressed as the matrix forms

$$\begin{cases} J(A+B) = \Delta + R \\ \frac{\mu_{\pm}}{\mu_{\pm}} JQ(A-B) = K(\Delta - R) \\ J(LA + L^{-1}B) = ST \\ \frac{\mu_{\pm}}{\mu_{\pm}} JQ(LA - L^{-1}B) = KST \end{cases} \quad (24)$$

with the help of the square matrixes defined by the matrix elements $J_{nm} = J_{n-m}(\frac{V_1}{\hbar\omega})$, $Q_{nm} = q_n^{\pm}\delta_{nm}$, $K_{nm} = k_n^{\pm}\delta_{nm}$, $S_{nm} = e^{ik_{zn}^{\pm}a}\delta_{nm}$, and $L_{nm} = e^{iq_m^{\pm}a}\delta_{nm}$ and the column matrixes by the matrix elements $A_n = a_n^{\pm}$, $B_n = b_n^{\pm}$, $\Delta_n = \delta_{n0}$, $R_n = r_{n0}^{\pm}$, and $T_n = t_{n0}^{\pm}$. Where R and T denote the matrices of reflecting and transmission amplitudes. From the matrix equation (24) one can obtain the matrix of the transmission amplitude

$$T = S^{-1}(M_2^{-1}L^{-1}M_1 - M_1^{-1}LM_2)(M_2^{-1}M_1 - M_1^{-1}M_2)\Delta, \quad (25)$$

where $M_1 = [J^{-1} + \frac{\mu_{\pm}}{\mu_1}Q^{-1}J^{-1}K]$ and $M_2 = (J^{-1} - \frac{\mu_{\pm}}{\mu_1}Q^{-1}J^{-1}K)$. The total electron-transmission probabilities of spin-up and spin-down components are given by

$$T^{\pm} = \sum_{m=0}^{+\infty} |t_{m0}^{\pm}|^2 \quad (26)$$

from which the conductance of the electrons through semiconductor heterostructures can be obtained by Landauer-Buttiker formula[25, 26]

$$G^{\pm} = \frac{2e^2}{h}T^{\pm} = \frac{2e^2}{h} \sum_{m=0}^{+\infty} |t_{m0}^{\pm}|^2. \quad (27)$$

We now study numerically the scattering of a incident wave by an oscillating quantum well of InP-GaSb-InP semiconductor hereostructures and calculate the conductivity with the help of Eq.(25)–(27). The minimum number of sidebands needed to be included in the sum of Eq.(26) depends on the oscillation amplitude of the potential well. In general, it is enough to take $N > V_1/\hbar\omega$ [27].

The mechanism of resonance considered here is different from Ref.[17] where the resonance originates from an accumulation of electrons in bound states of the well (this accumulation of electrons conversely produces strong feedback on the transmission in the incident channel). In our model, the interaction of electrons with the oscillating field leads to photon-mediated transmission resonances. The incident electrons can emit photons and drop to the bound states of the potential well. Similarly, the electrons in bound states can also jump to incident channels or other Floquet channels by absorbing photons. This forms the discrete channel of scattering required by Fano-type resonance. Once the energy difference between the incident electrons and the bound states of the well is equal to integer times the energy of one photon, transmission resonance occurs. In Fig.(1), we plot the conductivity $G^{\pm}$ as a function of the incident electron energy E_{z0} for $V_0 = 300meV$, $V_1 = 10meV$, $k_{\parallel} = 10^6cm^{-1}$, $\hbar\omega = 10meV$. The parameters of the semiconductor heterostructure are chosen as

$\gamma = 187eV \cdot \text{\AA}^3$, $\mu = 0.041m_e$ (m_e the mass of the free electron) for GaSb, $\gamma_1 = 8eV \cdot \text{\AA}^3$, $\mu_1 = 0.081m_e$ for InP according to Ref.[16]. In actual calculation we take $\gamma_1 \approx 0$ because $\gamma \gg \gamma_1$. Sidebands of $n = 0, \pm 1, \dots, \pm 5$ are taken into account so that $T^\pm = \sum_{n=0}^5 |t_{n0}^\pm|^2$. The conductivity pattern in Fig.(1) shows two obvious asymmetric resonance peaks, at $E_z^+ = 5.2 meV$ for the spin-up state “+” and $E_z^- = 2.44 meV$ for the spin-down state “-”. The corresponding bound state energies are $E_b^+ = -4.796 meV$, $E_b^- = -7.559 meV$ for $V_1 = 0$, and resonance energies satisfy the relation $E_z^\pm = \hbar\omega + E_b^\pm$. When E_z increases continuously and enters the second incident channel—*i.e.*, $\hbar\omega < E_z < 2\hbar\omega$ —the second set of asymmetric resonance peaks appears(see the inset of Fig.(1)), but they are very small because the probability of a two-photon process is much less than that of one-photon process. For an incident electron of given energy there exist similar resonance peaks in the conductivity when the oscillation frequency increases.

The amplitude of oscillating field indicates actually the strength of electron coupling with the external field. The correspondence between the resonance location and energy level of the potential well makes sense only when, strictly speaking, $V_1 \rightarrow 0$. The electron coupled with the applied field leads to the broadening of the level and thus the asymmetric resonance can take place within certain range of energy rather than at a single level. Figure 2 shows the variance of spectrum in which the asymmetric resonance peaks are getting “fat” with increasing oscillation amplitude for spin states “+” and “-”, which provides a means to adjust the line shape of Fano-type resonance by external parameters. When the amplitude of the oscillating field is very small, the effect of energy level broadening is inconspicuous and the Fano-type resonance displays sharp peaks. Thus the bound-state energy can be determined by location of the sharp resonance peaks according to $E_z^\pm = \hbar\omega + E_b^\pm$, which can be used to measure the structure parameters of semiconductor heterostructures such as thickness and band gaps and even spin-orbit coupling constant.

The locations of the asymmetric resonance peaks in energy parameter space depend not only on the width and depth of the well, but also on the oscillation frequency of external field. In Fig. 3, we plot the frequency dependence of the conductivity for spin states “+” and “-”. The asymmetric resonance peaks move toward the direction of high energy as the frequency increases. It is apparent that the location control of resonance peaks is easier by adjusting the field frequency than the parameters of the semiconductor heterostructure in practical experiments.

The spin-polarization-dependent splitting of Fano-type resonance peaks is advantageous to the realization of spin current. Figure 4 shows the spin-polarization-dependent transmission of electrons as a function of the electron energy according to $P = (T^+ - T^-)/(T^+ + T^-)$. Figure 4 indicates that the transmission current with the spin “-” polarization (solid line) is dominate [over 80% comparing with spin “+” polarization current (dashed line)] for the energy range E_z from $1 meV$ to $3.5 meV$. The characteristics of the energy E_z dependence of the spin-polarization current suggests that one can exploit the Fano-type resonances as the basis of a spin filter and control the external parameters—*e.g.*,

the oscillation frequency ω and the amplitude V_1 of the external field—to tune the energy to align with specific resonances.

In summary, we have investigated theoretically the property of the electron transport through a quantum well in semiconductor heterostructures with spin-orbit coupling and an applied field. The numerical results demonstrate that Dresselhaus spin-orbit coupling eliminates the spin degeneracy and leads to a splitting of asymmetric Fano-type resonance peaks in the conductivity. The spin polarization arising from the splitting of Fano-type resonance has an advantage to realize the spin current. The location and line shape of Fano-type resonance can be controlled by adjusting the oscillation frequency ω and amplitude V_1 of the external field. These interesting features not only deepen our fundamental understanding of the role of spin-orbit coupling in solids, but also may be a very useful basis for devising tunable spin filters.

This work was supported by the National Nature Science Foundation of China (Grant No. 10475053) and Shanxi Nature Science Foundation (Grant No. 20051002).

References

- [1] U. Fano, Phys. Rev. 124, 1866(1961).
- [2] U. Fano and J.W. Cooper, Phys. Rev. A 137, 1364(1965).
- [3] J.A. Simpson and U. Fano, Phys. Rev. Lett. 11, 158 (1963).
- [4] F. Cerdeira, T.A. Fjeldly, and M. Cardona, Phys. Rev. B 8, 4734(1973).
- [5] J. Feist, F. Capasso, C. Sirtori, K.W. West, and L.N. Pfeiffer, Nature (London) 390, 589(1997).
- [6] H. Schmidt, K.L. Campman, A.C. Gossard, and A. Imamoglu, Appl. Phys. Lett. 70, 3455 (1997).
- [7] J. Gores, D. Goldhaber-Gordon, S. Heemeyer, and M. A. Kastner, Phys. Rev. B 62, 2188(2000).
- [8] K. Kobayashi, H. Aikawa, S. Katsumoto, and Y. Iye, Phys. Rev. Lett. 88, 265806 (2002).
- [9] R. Franco, M. S. Figueira and E. V. Anda, Phys. Rev. B 67, 155301 (2003).
- [10] K. Kobayashi, H. Aikawa, A. Sano, S. Katsumoto, and Y. Iye, Phys. Rev. B 70, 35319 (2004).
- [11] Masahiro Sato, Hisashi Aikawa, Kensuke Kobayashi, Shingo Katsumoto, and Yasuhiro Iye, Phys. Rev. Lett. 95, 66801 (2005).
- [12] I. A. Shelykh and N. G. Galkin, Phys. Rev. B 70, 205328(2004).

- [13] S. Datta and B. Das, Appl. Phys. Lett., 56, 665(1990); K. C. Hall, W. H. Lau, K. Gundogdu, M. E. Flatte and T. F. Boggess, Appl. Phys. Lett. 83, 2937(2003).
- [14] I. P. Smorchkova and N. Samarth, Phys. Rev. Lett. 78, 3571(1997); C. Bena and L. Balents, Phys. Rev. B65, 11510(2002); J. P. McGuire, C. Ciuti, and L. J. Sham, Phys. Rev. B69, 115339(2004); J. P. Morten, A. Brataas and W. Belzig; Phys. Rev. B70, 212508 (2004); S. Urazhdin, R. Loloee, and W. P. Pratt, Jr., Phys. Rev. B71, 100401(2005); J. P. Morten, A. Brataas, and W. Belzig, 72, 014510 (2005).
- [15] J. E. Hirsch, Phys. Rev. Lett. 83, 1834 (1999); S. Zhang, Phys. Rev. Lett. 85, 393(2000); S. Murakami, N. Nagaosa, and S. Zhang, Science 301,1348 (2003); J. Sinova et al., Phys. Rev. Lett. 92, 126603 (2004). S.-Q. Shen, Phys. Rev. B 70, 081311 (2004); B. A. Bernevig and S.-C. Zhang, Phys. Rev. Lett. 95, 016801 (2005); G.Y. Guo,Yugui Yao, and Qian Niu, Phys. Rev. Lett. 94, 226601 (2005); J. Wunderlich, B. Kaestner, J. Sinova and T. Jungwirth, Phys. Rev. Lett. 94, 047204 (2005).
- [16] V. I. Perel, S. A. Tarasenko and I. N. Yassievich, Phys. Rev. B67, 201304(2003); M. M. Glazov, P. S. Alekseev, M. A. Odnoblyudov, V. M. Chistyakov, S. A. Tarasenko and I. N. Yassievich, Phys. Rev. B71, 155313(2005).
- [17] W. Cai, P. Hu, T. F. Zheng, B. Yudanin, and M. Lax, Phys. Rev. B41, 3513(1990)
- [18] G. Dresselhaus,Phys. Rev. 100, 580(1955)
- [19] J. H. Shirley, Phys. Rev. 138, B979 (1965).
- [20] M. Holthaus and D. Hne, Phys. Rev. B47, 6499(1993)
- [21] T. Fromherz, Phys. Rev. B56, 4772(1997)
- [22] G. Burmeister and K. Maschke, Phys. Rev. B57, 13050(1998)
- [23] W. Li and L. E. Reichl, Phys. Rev. B60, 15732(1999)
- [24] P. F. Bagwell and R. K. Lake, Phys. Rev. B46, 15329(1992)
- [25] R. Landauer, J. Phys. Condens. Matter 1, 8099(1989)
- [26] M. Buttike, Phys.Rev. Lett. 57, 1761(1986); T. Christen and M. Buttiker, Phys. Rev. Lett. 77, 143(1996))
- [27] E. N. Bulgakov, and A. F. Sadreev, J. Phys.:Condens. Matter 8, 8869(1996)

Figure captions

Fig.1 Splitting of Fano-type resonance in Conductivity $G^\pm$ for $V_0 = 300meV$, $V_1 = 10meV$, $a = 60\text{\AA}$, $k_{\parallel} = 10^6 cm^{-1}$, $\hbar\omega = 10 meV$, $\mu = 0.041m_e$, $\mu_1 = 0.081m_e$, $\gamma = 187eV\cdot\text{\AA}^3$, and $\gamma_1 = 0$. The inset is a detail of the tiny resonance peaks resulting from electrons exchanging two photons with applied field.

Fig.2 Dependence of the width of Fano-type resonance peaks in conductivity $G^\pm$ on amplitude of applied field V_1 for spin states “+” and “-” with the parameters in Fig. 1.

Fig.3 Conductivity $G^\pm$ as a function of E_z for different $\hbar\omega$, indicating that resonance peaks move toward the direction of high energy as $\hbar\omega$ increases, with $V_1 = 15 meV$ and the other parameters in Fig. 1.

Fig.4 Dependence of the polarization efficiency of the transmission electrons on the energy of incident electron and spin orientation. The solid curve denotes polarization along spin “-” and the dashed curve denotes spin “+” with $V_1 = 30 meV$ and the other parameters in Fig. 1.

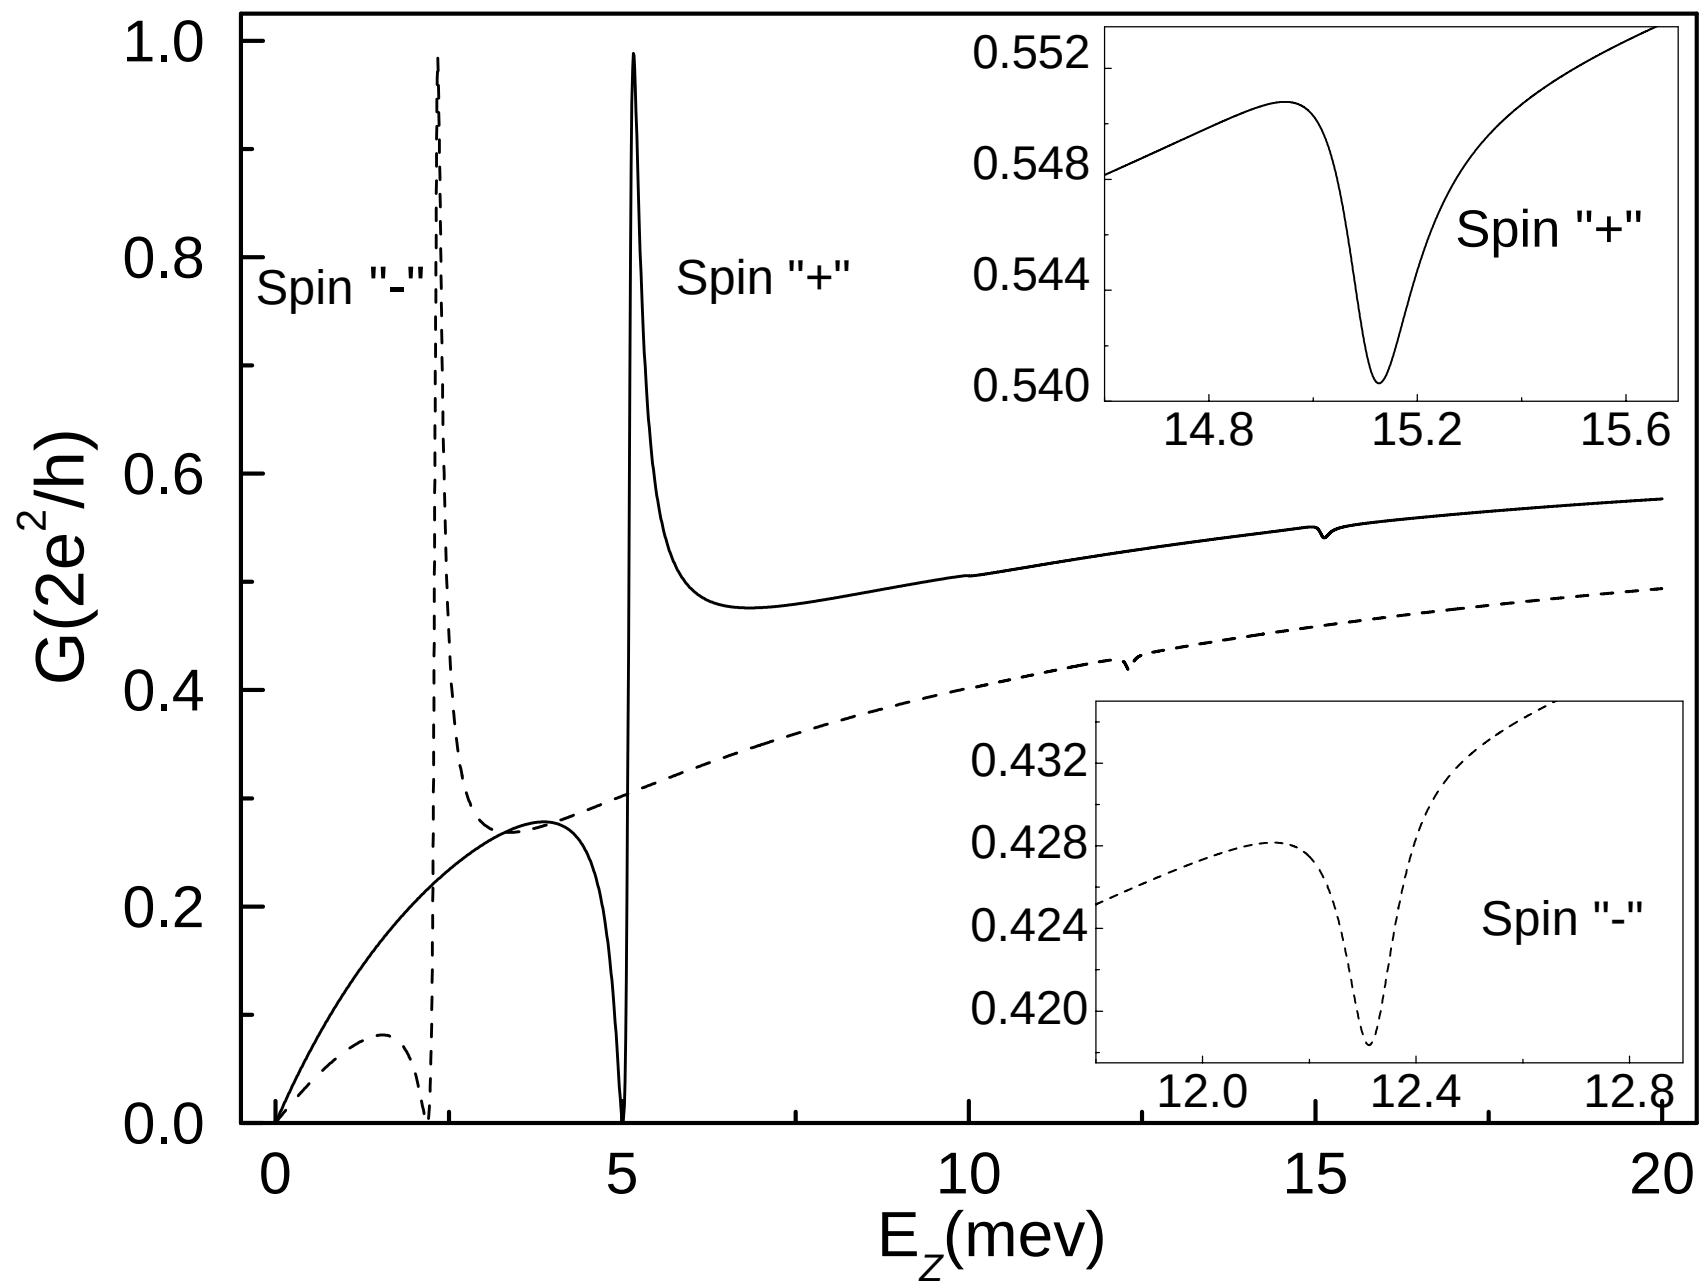


Figure 1

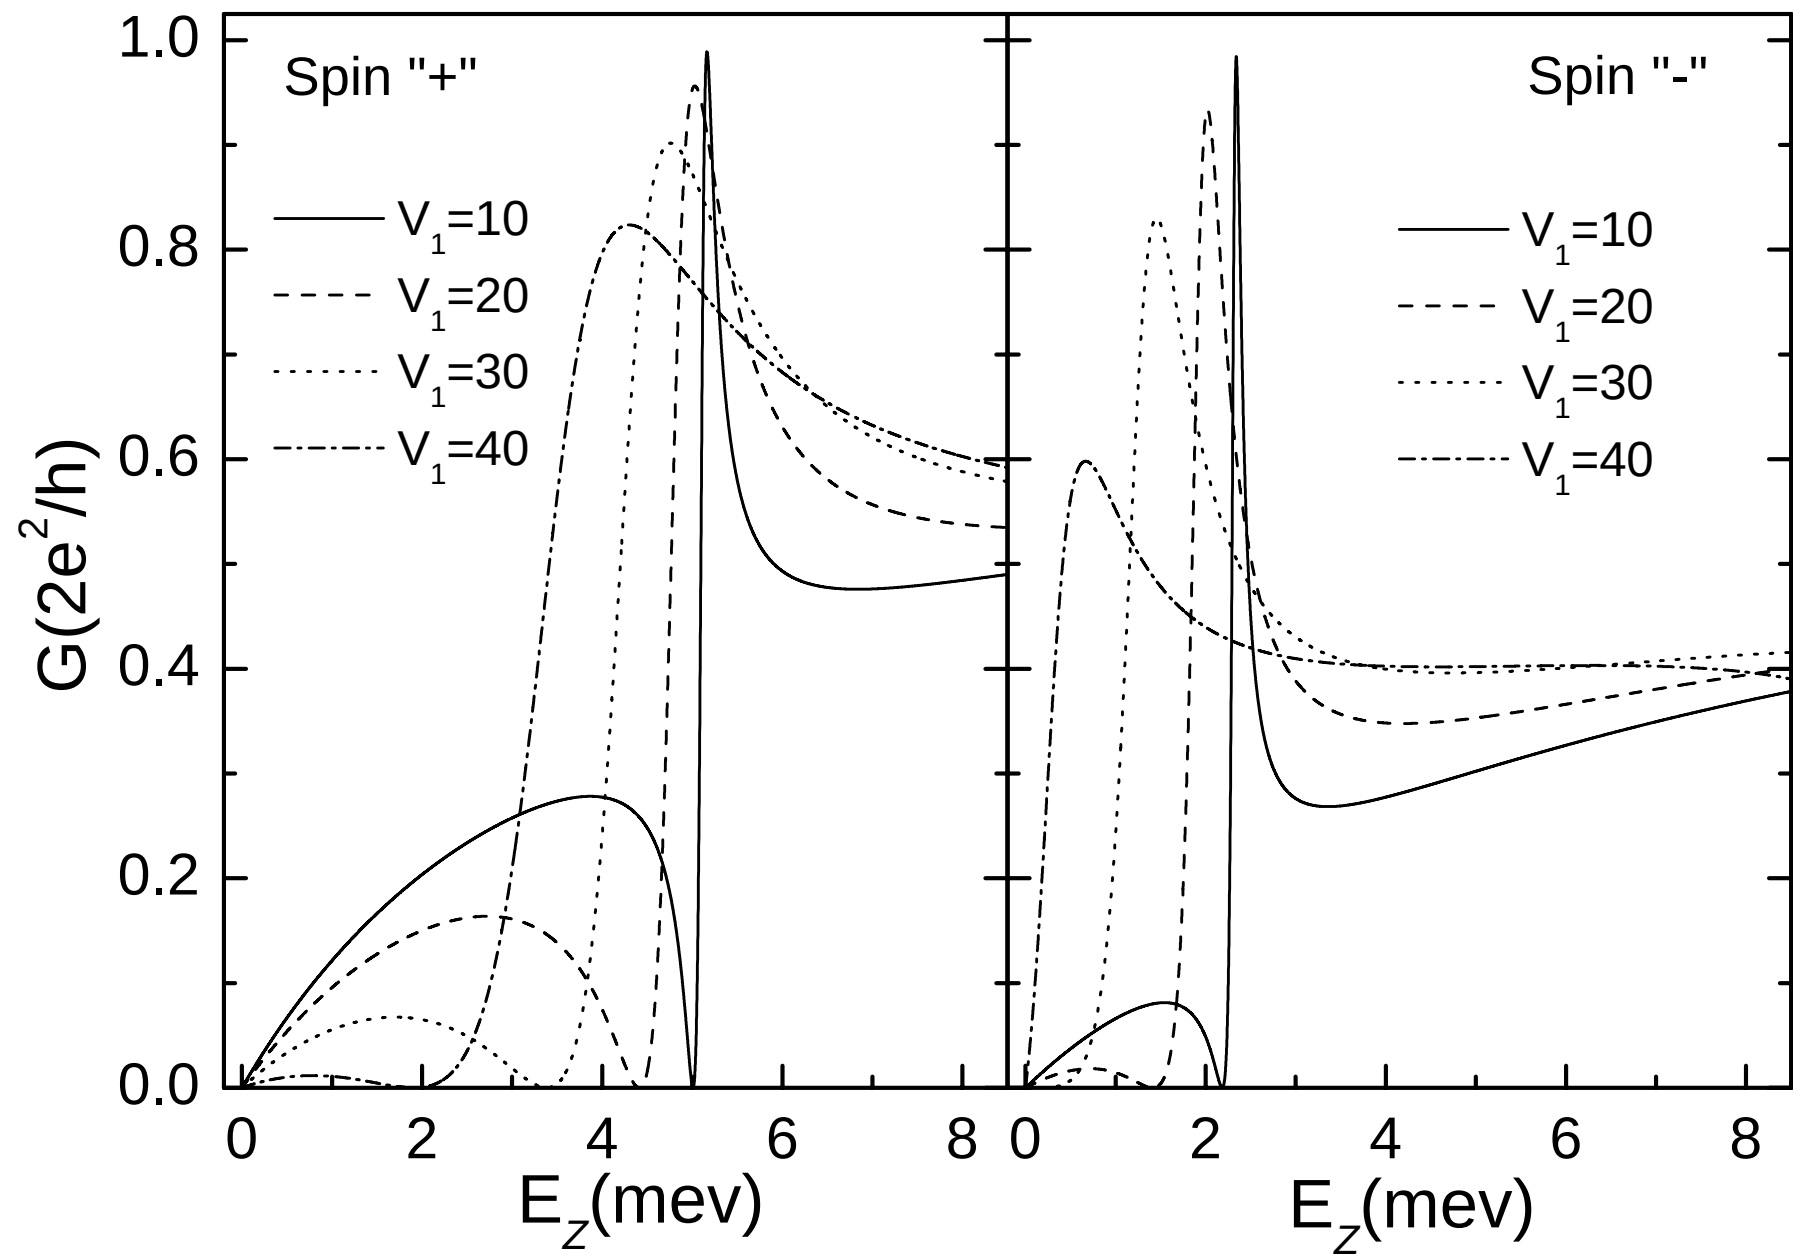


Figure 2

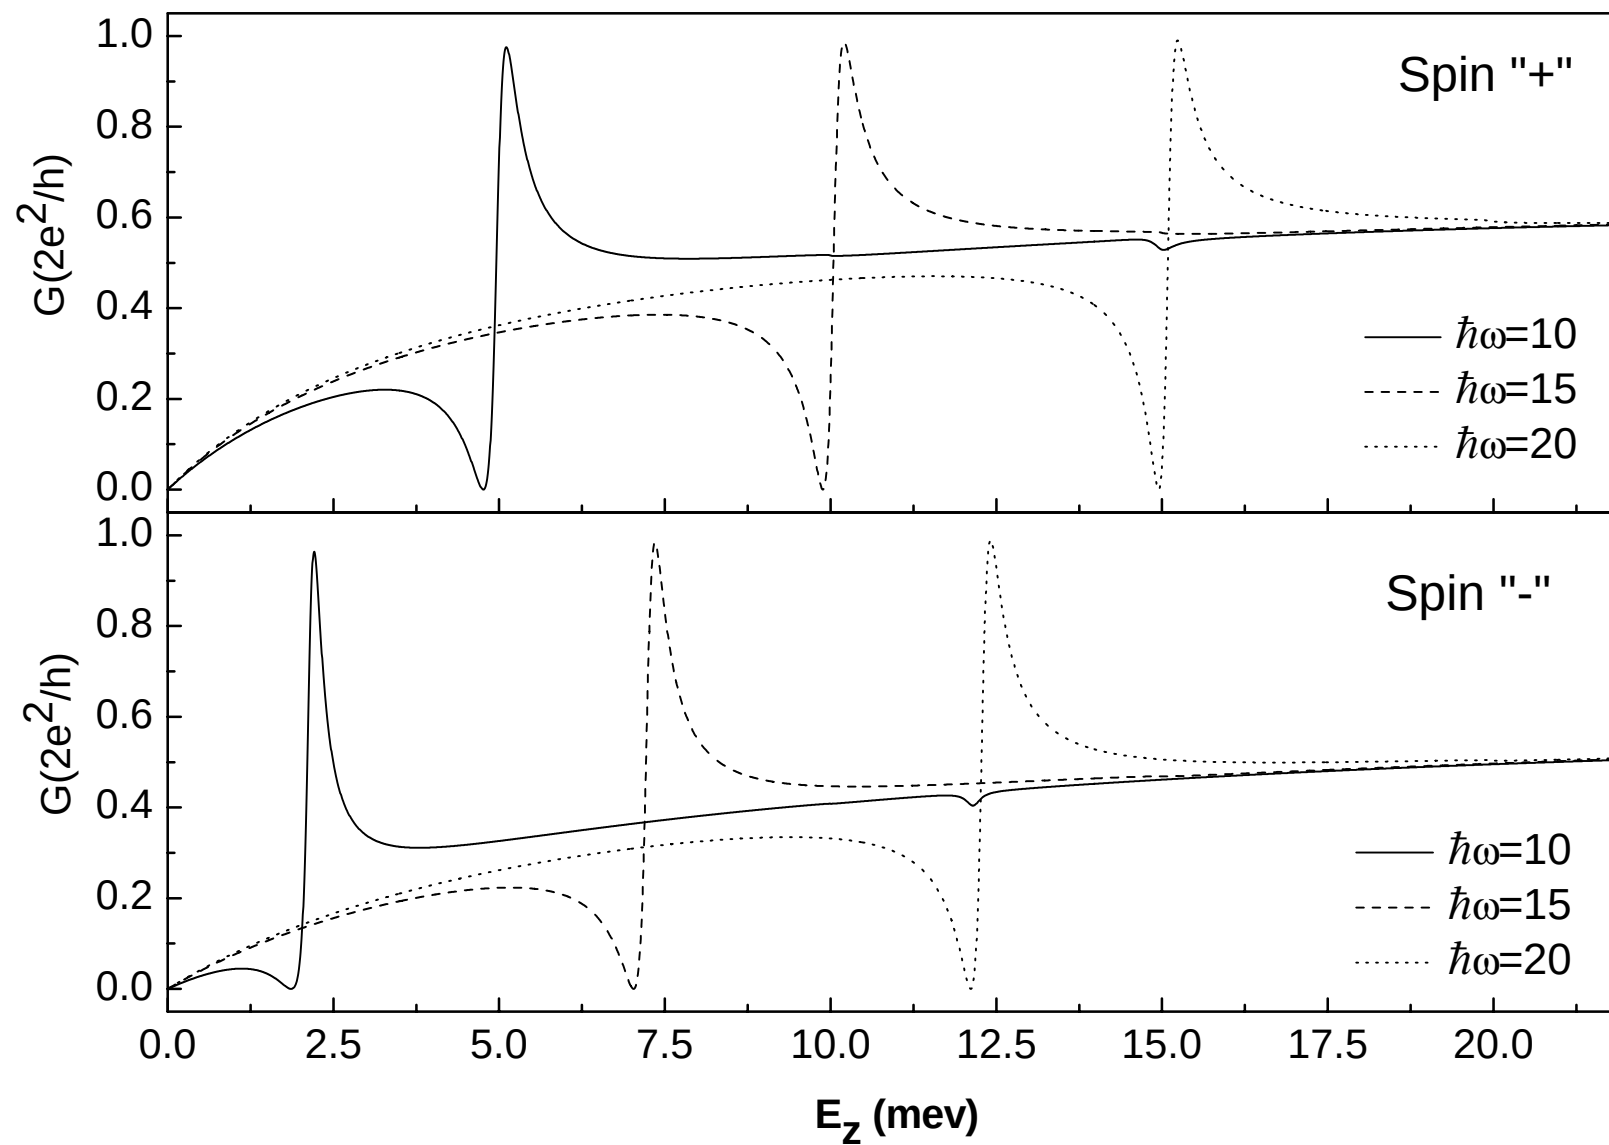


Figure 3

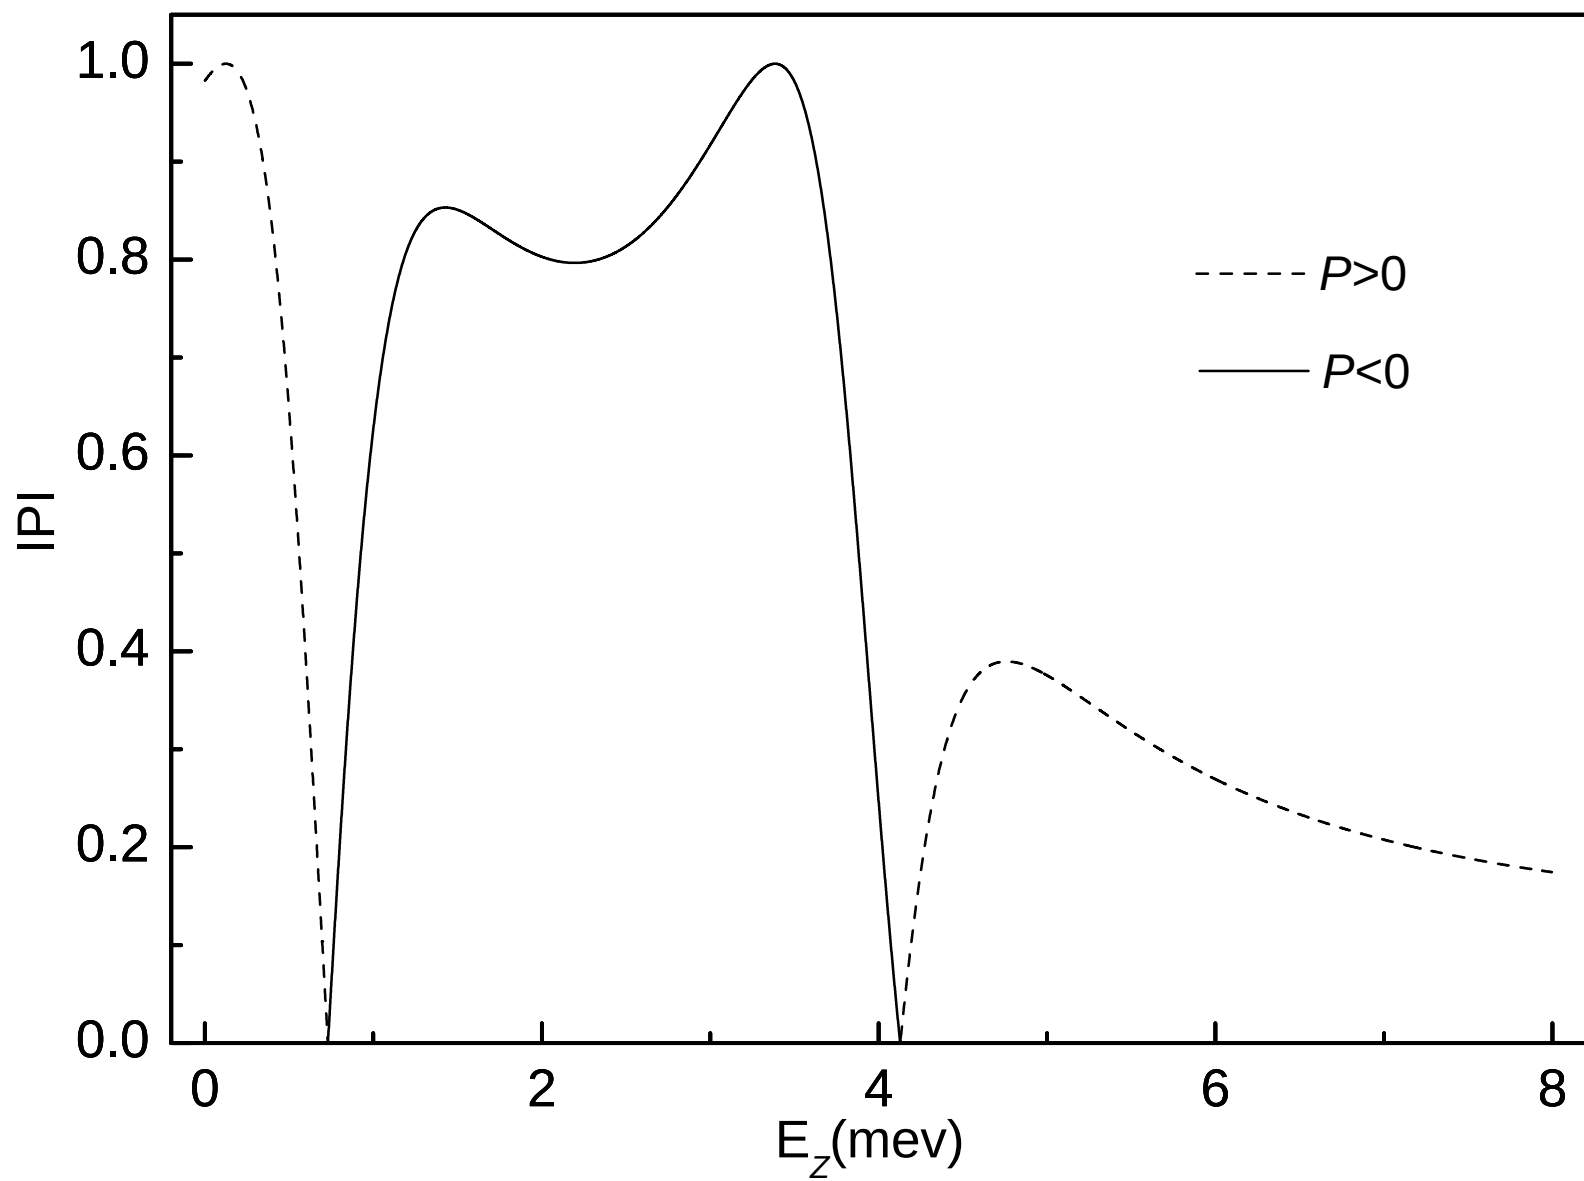


Figure 4